



JAMSHORO POWER COMPANY LIMITED

(A Government Owned Corporate Entity)

Mohra Jabal, Dadu Road, Jamshoro

Phone: 022-9213706 Fax: No.022-9213708

Email: ceo@jpcl.com.pk Web: www.jpcl.com.pk



Office of the Project Director (PIU)

2x660 MW C.F.P.P Jamshoro

2No. CE(O&M)/PD PIU/CFPP/Proc./ (Elect)/ 1867

Dated: 23/07-2025

1. M/s. M/s. Hammad Engineering Works, Plot Number, D-66, Unit No.8, Latifabad, Hyderabad	2. M/s. Bismillah Engineering Works, 315, Area 48/H, Haq Baho Town, Korangi No.1 Karachi
3. M/s Techno -Pak Constructions Co. H-A # 4/09 Mehran University Housing Society District Jamshoro Cell no. 0332-2513058	4. M/s. S.J Engineering Works, House No.5/79 Lalchandabad, Mirpurkhas Sindh.
5. M/s S.S Constructors and Traders Site office London Town Shop No.3 Near Al Rehman Hotel Main Sehwan Road Jamshoro Cell no. 03452363095	6. Notice Board 7. JPCL Website

Subject: Lump-sum quotation for removal of 19 Nos. 11kV Poles Lattice structured Poles installed in front of Boundary Wall along Indus Highway of 660MW Coal Power Plant Jamshoro.

Dear Sirs,

Jamshoro Power Company Limited-JPCL (a fully Government owned entity, incorporated under the Companies Ordinance 1984, with its principal place of business at Jamshoro, Sindh Pakistan), intends to seek the quotation for carrying out the subject work and invites quotations on "Lumpsum Basis" fully covering all the costs of labour, material, tools, equipments or machinery involved into execution of entire work in given timelines as detailed below;

Quotation:

SR NO	Description	ENGINEER ESTIMATE				CONTRACTOR'S QUOTE
		Unit	Quantity	Rate	Amount	
1.	Excavation earth work in irrigation drains channels drain etc shingle and gravel formation. (WCSR-2022 P2-1/5)	c.um	39.54	805.39	31845.1206	
2.	Dismantling cement concrete 1:2:4 (WCSR-2022 o-7/14-c)	c.um	16.34	4061.77	66369.3218	
3.	Dismantling of poles structure (WCSR-2022 P3-4/32)	kg	6326	19.68	124488.3984	
4.	Dismantling of insulators, conductor wire disc insulator, arm shoulder arms of 19nos of poles (quotation attached)	Complete job	01	135000	135000	
5.	Carriage of 3.0 cum or 5metric ton of all type of material like Earth slit, steel grades, M.s bars etc 1km (WCSR-2022P-1-1-1)	Cum/metric ton	63.25	620.7	39259.275	
6.	Total Amount				396962.1158	
	SRB Tax 15%				59544.31	
	Gross Total Rs.				456506.4258	
	(in words: Rupees: Four Hundred Fifty Six Thousand Five Hundred Six only)					



JAMSHORO POWER COMPANY LIMITED

(A Government Owned Corporate Entity)

Mohra Jabal, Dadu Road, Jamshoro

Phone: 022-9213706 Fax: No.022-9213708

Email: ceojpcl@jpcl.com.pk Web: www.jpcl.com.pk



Office of the Project Director (PIU)

2x660 MW C.F.P.P Jamshoro

Terms & Conditions:

1. Lump-Sum Price:

The total quoted amount is fixed and includes all labor, machinery, fuel, supervision, and overheads. No adjustments will be made unless there's a significant change in scope or site conditions. The Work Order will be placed upon the firm offering the lump sum lowest quoted rates for the execution of whole works.

2. Work Scope:

The Contractor is required to remove de-energized and redundant 11kV overhead conductors, associated fittings, and structural poles located near energized live 11kV lines.

All dismantled materials must be **collected, labeled, and transported safely** as per JPCL's instructions.

The site must be **cleaned and restored to original condition** after completion.

3. Pre-Job Submissions:

The Contractor shall submit the following before starting the job:

- **Detailed Method Statement and Dismantling Plan**
- **Job Safety Analysis (JSA) and Risk Assessment Report**
- **Emergency Response Plan (ERP)** specific to the job site

4. Working Hours and Days:

Eight (8) Hours per day, six (6) days a week, with one (1) weekly rest day.

5. Work Methodology: Safety Conditions for Removal of 11kV De-energized Overhead Conductors and Poles Near Live Lines

- No work shall commence without obtaining a **formal Permit to Work (PTW)** from the authorized JPCL officer, and LOTO protocols from 132KV Grid Station for Complete isolation of the circuit before starting the job
- The Contractor must coordinate with JPCL's site management for isolation verification and procedural compliance.
- All works shall be performed under **direct supervision of JPCL's authorized electrical engineer/representative**.
- Qualified Personnel must be deployed for dismantling poles and assemblies
- **Safe Working Distances:** The Contractor shall maintain **minimum safety clearance from live conductors** in accordance with:
 - **IEC/NEC standards** or equivalent local electrical code
 - **Minimum 1.2 meters horizontal and vertical distance** for 11kV unless otherwise advised by JPCL engineering staff.
- Install **temporary barriers, warning signs, and danger flags** around the energized lines
- **Isolation & Earthing:** Confirm that the **redundant lines and poles are physically disconnected and earthed** to prevent back feed.

6. Tools & Equipment:

- Use **insulated tools, ropes, and lifting equipment** to prevent accidental contact with live parts.
- All rigging, cranes, or lifting devices must maintain the required **safety clearance from energized lines**.
- **Use of Personal Protective Equipment (PPE)** All workers must wear:
 - **Arc-rated clothing**



JAMSHORO POWER COMPANY LIMITED

(A Government Owned Corporate Entity)

Mohra Jabal, Dadu Road, Jamshoro

Phone: 022-9213706 Fax: No.022-9213708

Email: ceo@jpcl.com.pk Web: www.jpcl.com.pk



Office of the Project Director (PIU)

2x660 MW C.F.P.P Jamshoro

- Insulated gloves (Class II for 11kV)
- Safety helmet with chin strap
- Face shields and goggles
- Safety shoes (electrical hazard resistant)

6. Site Access & Safety Emergency Provisions:

- Maintain an **on-site first aid kit** and designate a **trained first aider**.
- Ensure **immediate communication arrangements** with JPCL Control Room and local emergency services.

The client should ensure free and safe access to the site. All safety measures and necessary precautions are the contractor's responsibility. The Contractor shall be entirely responsible for the safety and security of the personnel and machinery and will observe all safety measures during work.

7. Timeframe for submission of Quotation:

The sealed quotations may be delivered in person up to **1130Hrs on 30-07-2025** and will be opened on the same day at 1200Hrs. in the presence of contractors who choose to be present at the office of Director Procurement PIU, 660MW CFPP Jamshoro.

The quotations may be deposited in the tender box kept for the purpose at the office of. Director Procurement, 2nd Floor Main Admin Building, Thermal Power Station, Jamshoro.

The quotations received late will not be accepted.

The quotations with overwriting/ cutting or doubtful figures will be rejected.

The work will commence immediately after receiving the work order and completion is expected in 30 days with 4 Sundays as holidays.

8. Mandatory Tax requirement/Eligibility of Contractors:

The contractor/firm must be PEC registered and have registration with FBR and SRB and be on an active taxpayer list of FBR.

9. Sindh Stamp Duty

0.35% shall be paid as stamp duty before issuance of work order

10. Sindh Sales Tax

Sindh Service Tax (SST) is fixed and will be charged at prevailing rates @15% of quotation value.

11. JPCL Facilities for execution of work

The JPCL will not provide any transport, machinery, fuel, tools or residence for execution of this work.

12. Compliance:

- The Contractor shall comply with all relevant **Labour Laws, Electrical Safety Codes, and JPCL HSE Policies**.
- Non-compliance with safety requirements may result in **immediate suspension of work and/or contract termination**.

13. Payment Terms

All payments will be due on final completion of work, within 30 days of the invoice through Cross Cheque, in favor of the Firm.



JAMSHORO POWER COMPANY LIMITED

(A Government Owned Corporate Entity)

Mohra Jabal, Dadu Road, Jamshoro

Phone: 022-9213706 Fax: No.022-9213708

Email: ceojpcl@jpcl.com.pk Web: www.jpcl.com.pk



Office of the Project Director (PIU)

2x660 MW C.F.P.P Jamshoro

14. Force Majeure

Delays due to weather, natural calamities, strikes, or other unforeseen events beyond the control of the contractor will not be penalized.

15. Validity

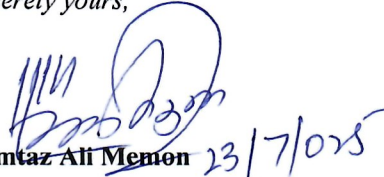
This quotation should be valid for the period of one month from the date of issue.

16. Acceptance and Rejection

Acceptance of this quotation and issuance of a work order implies agreement with all the terms and conditions stated above.

JPCL reserves the right to annul this Quotation at any time before issuance of the Work Order/Service Order as per Rule-33 of the PPRA.

Sincerely yours,


Mumtaz Ali Memon 23/7/025

Director Procurement, PIU

660MW Coal Fired Power Project

Jamshoro.

C.c to

1. The Chief Executive Officer, JPCL (GENCO-I) Jamshoro.
2. Project Director PIU, 660MW CFPP, Jamshoro
3. The Chief Financial Officer, JPCL (GENCO-I), Jamshoro.
4. The Director (Technical) PIU, 660MW CFPP, Jamshoro.
5. Manager Security, JPCL (GENCO-I) Jamshoro
6. Master File.